All reproduction + intellectual property rights reserved by Architecture Incorporated © 2016

JOHN WAYLAND ES - RENOVATION AND ADDITION

801 N. MAIN STREET,
BRIDGEWATER, VA 22812

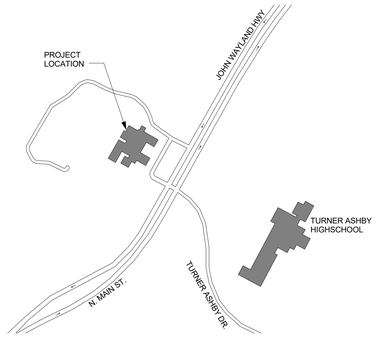

SITE LOCATION MAP
N.T.S.

OWNER:
ROCKINGHAM COUNTY SCHOOL BOARD

100 MT CLINTON PIKE
HARRISONBURG, VA 22802

STEVE REID
P: 540.434.4434

ARCHITECT:
ARCHITECTURE INCORPORATED

1902 CAMPUS COMMONS DRIVE
SUITE 101
RESTON, VA 20191

P: 703.476.3900

MPEF:
ASCENT ENGINEERING GROUP

4932 FRONAGE RD NW
ROANOKE, VA 2409

P: 540.265.4444

STRUCTURAL:
BEI STRUCTURAL ENGINEERS INC.

3930 PENDER DRIVE
SUITE 175
FAIRFAX, VA 22030

P: 703.890.5000

CIVIL:
TIMMONS GROUP

608 PRESTON AVENUE
SUITE 200
CHARLOTTESVILLE, VA 22903

P: 434.327.1691

ARCHITECTURAL / INTERIORS ABBREVIATIONS:

A		**F (CONT.)**		**P (CONT.)**	
AB	ANCHOR BOLT	F/C	FACE OF CONCRETE	PL OR PLAM	PLASTIC LAMINATE
ABV	ABOVE	F/F	FACE OF FINISH	PLAS	PLASTER
AC	AIR CONDITIONING	F/M	FACE OF MASONRY	PLUMB	PLUMBING
ACOUS	ACOUSTICAL	F/O	FACE OF	PLYWD	PLYWOOD
ACT	ACOUSTIC CEILING TILE	F/SH	FACE OF SHEATHING	PNL	PANEL
ADD'N	ADDITION	F/S	FACE OF STUD	PORT	PORTABLE
ADJ	ADJUSTABLE	F/W	FACE OF WALL	PR	PAIR
AFF	ABOVE FINISHED FLOOR	FP	FIREPROOFING	PRCST	PRECAST
AGGR	AGGREGATE	FR	FRAME	PREFAB	PREFABRICATE(D)
AL	ALUMINUM	FRMG	FRAMING	PROJ	PROJECT
ALT	ALTERNATE	FRT	FIRE RETARDANT TREATED	PTD	PAPER TOWEL DISPENSER OR PAINTED
∠	ANGLE	FS	FULL SIZE	PTR	PAPER TOWEL RECEPTACLE
ANOD	ANODIZED	FT	FOOT OR FEET	PART	PARTITION
AP	ACCESS PANEL	FTG	FOOTING	PM	PROPOSED MODIFICATION
APPD	APPROVED	F-F	FACE TO FACE	PROD	PRODUCTION, PRODUCT
APPROX	APPROXIMATE	FUR	FURRING	PROP	PROPERTY
ARCH	ARCHITECT OR ARCHITECTURAL	FUT	FUTURE	PT	PRESSURE TREATED OR PORCELAIN TILE OR POST TENSIONED
ASPH	ASPHALT	**G**		PVC	POLYVINYL CHLORIDE
AUTO	AUTOMATIC	GA	GAUGE	PWR	POWER
AVG	AVERAGE	GALV	GALVANIZED	**Q**	
&	AND	GL	GLASS	QT	QUARRY TILE
ANUN	ANNUNCIATOR	GR	GUARDRAIL	QUAL	QUALITY
B		GB	GRAB BAR	QUAN	QUANTITY
BC	BRICK COURSE(S)	GMMU	GLASS MESH MORTAR UNIT	**R**	
BD	BOARD	GWB	GYPSUM BOARD	R	RISER
BFS	BOTTLE FILLING STATION	GS	GRAVEL STOP	(RA)	RANGE
BTW	BETWEEN	**H**		R/A	RETURN AIR
BLDG	BUILDING	HB	HOSE BIBB	RAD	RADIUS
BLK	BLOCK	HC	ACCESSIBLE	RB	RESILIENT BASE
BLKG	BLOCKING	HD	HEAD	RD	ROOF DRAIN
BM	BEAM OR BENCH MARK	HDBD	HARDBOARD	REBAR	REINFORCING BAR
BOTT	BOTTOM	HT	HEIGHT	RECEP	RECEPTACLE
BE	BOTTOM ELEVATION	HM	HOLLOW METAL	REF	REFERENCE
B/O	BOTTOM OF	HP	HIGH POINT	(REF)	REFRIGERATOR
BRK	BRICK	HDWR	HARDWARE	REFL	REFLECTED
BRKT	BRACKET	HDWD	HARDWOOD	REINF	REINFORCED
BRZ	BRONZE	HCWD	HOLLOW CORE WOOD DOOR	RESIL	RESILIENT
BSMT	BASEMENT	HORIZ	HORIZONTAL	REQD	REQUIRED
BUR	BUILT UP ROOFING	HR	HOUR	RH	RIGHT HAND OR ROBE HOOK
BW	BOTH WAYS	HTG	HEATING	RM	ROOM
BF	BOTH FACES	HVAC	HEATING, VENTILATION AND AIR CONDITIONING	RD	ROUND OR ROAD
BRG	BEARING	HW	HOT WATER	RO	ROUGH OPENING
C		**I**		REV	REVISION OR REVERSE
CAB	CABINET	ID	INSIDE DIAMETER	RTU	ROOFTOP UNIT
CB	CATCH BASIN	INCL	INCLUDE (D) (ING)	**S**	
C/C	CENTER TO CENTER	INFO	INFORMATION	S	SOUTH
CEM	CEMENT	INSUL	INSULATION	S4S	SURFACED FOUR SIDES
CG	CORNER GUARD	INT	INTERIOR	SAN	SANITARY
CHAN	CHANNEL	INCAN	INCANDESCENT	SC	SEALED CONCRETE OR SOLDIER COURSE
CJ	CONTROL JOINT	IWB	INTERACTIVE WHITE BOARD	SCWD	SOLID CORE WOOD DOOR
CLKG	CAULKING			SD	SOAP DISPENSER
CL	CENTER LINE	**J**		SCHED	SCHEDULE
CLG	CEILING	JC	JANITOR CLOSET	SCHEM	SCHEMATIC
CLO	CLOSET	JB	JUNCTION BOX	SECT	SECTION
CLR	CLEAR	JST	JOIST	SEL	SELECT
CO	CLEAR OPENING OR CLEAN OUT	JT	JOINT	SERV	SERVICE
COL	COLUMN			SH	SHELF OR SHELVING
CONC	CONCRETE	**K**		SHT	SHEET
CONN	CONNECT OR CONNECTION	KIT	KITCHEN	SHWR	SHOWER
CONST	CONSTRUCTION	KO	KNOCKOUT	SPEC'L	SPECIAL
CONT	CONTINUOUS	KP	KICK PLATE	SPECS	SPECIFICATION(S)
CONT'D	CONTINUED	KRM	KEYED REMOVABLE MULLION	SPGL	SPANDREL GLASS
CONTR	CONTRACTOR	KS	KNEE SPACE	SPKR	SPEAKER
COR	CORNER			SQ	SQUARE
CORR	CORRIDOR	**L**		SF (or) Sq.Ft.	SQUARE FEET
CORRUG	CORRUGATED	LAB	LABORATORY	SND	SANITARY NAPKIN DISPENSER
CPT	CARPET	LAM	LAMINATE	SOLS	SOLID SURFACE
CNTR (T)	COUNTER (TOP)	LAT	LATERAL	SPED	SPECIAL EDUCATION
CRS	COURSE(S)	LAV	LAVATORY	SS	STAINLESS STEEL
CSK	COUNTERSUNK / SINK	LB (or #)POUND		S/S	SERVICE SINK
CTR	CENTER	LH	LEFT HAND	SP	SMART PROJECTOR
CW	COLD WATER	LIN	LINEAR	ST	STAIR
CT	CERAMIC TILE	LKR	LOCKER	STC	SOUND TRANSMISSION CLASS
CMU	CONCRETE MASONRY UNIT	LL	LIVE LOAD	STD	STANDARD
CF/CI	CONTRACTOR FURNISHED / CONTRACTOR INSTALLED	LONG'L	LONGITUDINAL	STL	STEEL
CUST	CUSTODIAL	LVR	LOUVER (S)	STOR	STORAGE
CUSTCL	CUSTODIAL CLOSET	LT	LIGHT	STRUCT	STRUCTURAL
D		LTG	LIGHTING	SURF	SURFACE
DA	DOUBLE-ACTING	LTWT	LIGHT WEIGHT	SURR	SURROUND
DBL	DOUBLE	LP	LOW POINT	SUSP	SUSPEND(ED)
DEPT	DEPARTMENT			SYM	SYMMETRICAL
DET	DETAIL	**M**		SYST	SYSTEM
DF	DRINKING FOUNTAIN	MACH	MACHINE	SPL	SPLASH
(D)	DRYER	MAINT	MAINTENANCE	SIM	SIMILAR
DD	DECK DRAIN	MMBG	MAGNETIC MARKER BOARD GLOSS		
DIA	DIAMETER	MMBM	MAGNETIC MARKER BOARD MATT	**T**	
DIAG	DIAGONAL	MATL	MATERIAL	T	TREAD
DIM	DIMENSION	MAX	MAXIMUM	TAN	TANGENT
DISP	DISPOSER OR DISPENSER	MED	MEDIUM	TB	TACK BOARD
DIV	DIVISION	MECH	MECHANICAL	T&B	TOP AND BOTTOM
DK	DARK	MEMB	MEMBRANE	TECH	TECHNICAL
DN	DOWN	MTL	METAL	TEL	TELEPHONE
DO	DOOR OPENING	MEZZ	MEZZANINE	TEMPD	TEMPERED
DR	DOOR	MFG	MANUFACTURING	TEMP	TEMPORARY
DS	DOWNSPOUT	MFR	MANUFACTURER	THK	THICK(NESS)
DSP	DRY STANDPIPE	MGR	MANAGER	TOC	TOP OF CURB OR CONCRETE
DWG	DRAWING	MIN	MINIMUM	TOS	TOP OF STEEL
DWR	DRAWER	MIRR	MIRROR	TOP	TOP OF PAVEMENT
DL	DEAD LOAD	MISC	MISCELLANEOUS	TOM	TOP OF MASONRY
(DW)	DISHWASHER	MMB	MAGNETIC MARKER BOARD	TOW	TOP OF WALL
E		MO	MASONRY OPENING	TPH	TOILET PAPER HOLDER
(E)	EXISTING	MTD	MOUNTED	TV	TELEVISION
E	EAST	MULL	MULLION	TYP	TYPICAL
EA	EACH	(MW)	MICROWAVE	T/O	TOP OF
EJ	EXPANSION JOINT			TW	THRU WALL
EL	ELEVATION	**N**			
ELEC	ELECTRIC	N	NORTH	**U**	
ELEV	ELEVATOR	NAT	NATURAL	(UCR)	UNDER COUNTER REFRIGERATOR
EMER	EMERGENCY	NEG	NEGATIVE	UL	UNDERWRITERS LABORATORY
ENCL	ENCLOSURE	NIC	NOT IN CONTRACT	UNFIN	UNFINISHED
ENG	ENGINEER	NO (OR #)	NUMBER	UTIL	UTILITY
EP	ELECTRICAL PANEL	NOM	NOMINAL	UR	URINAL
EQ	EQUAL	NRC	NOISE REDUCTION COEFFICIENT	UNO	UNLESS NOTED OTHERWISE
EQUIP	EQUIPMENT	NTS	NOT TO SCALE	**V**	
E/W	EACH WAY	**O**		VAR	VARIABLE OR VARIES
EWC	ELECTRIC WATER COOLER	(O)	OVEN	VB	VAPOR BARRIER
EXCAV	EXCAVATED	OA	OVERALL	VIF	VERIFY IN FIELD
EXH	EXHAUST	OC	ON CENTER	VIN	VINYL
EXIST	EXISTING	OD	OUTSIDE DIAMETER	VCT	VINYL COMPOSITION TILE
EXP	EXPANSION	OFD	OVER FLOW DRAIN	VERT	VERTICAL
EXT	EXTERIOR	OFF	OFFICE	VEST	VESTIBULE
F		OH	OPPOSITE HAND	VNR	VENEER
FA	FIRE ALARM	OPNG	OPENING	VOL	VOLUME
FABR	FABRICATE	OPP	OPPOSITE	VWC	VINYL WALL COVERING
FC	FIRE CODE	ORIG	ORIGINAL		
FD	FLOOR DRAIN	OVRHD	OVERHEAD	**W**	
FDC	FIRE DEPARTMENT CONNECTION	OZ	OUNCE	W	WEST
FDN	FOUNDATION	OF/OI	OWNER FURNISHED / OWNER INSTALLED	W/	WITH (Spell out when at end of line)
FE	FIRE EXTINGUISHER	OF/CI	OWNER FURNISHED / CONTRACTOR INSTALLED	(W)	WASHER
FEC	FIRE EXTINGUISHER CABINET	**P**		WAP	WIRELESS ACCESS POINT
FF	FINISH FLOOR	P	PAINT	WB	WHITE BOARD
FH	FLAT HEAD	PERP	PERPENDICULAR	WD	WOOD
FHC	FIRE HOSE CABINET	PART BD	PARTICLE BOARD	WH	WATER HEATER OR WALL HUNG
FHR	FIRE HOSE RACK	PAV	PAVING OR PAVEMENT	W/IN	WITHIN
FIN	FINISH	PB	PENCIL SHARPENER BLOCK OR PORCELAIN BASE	WLD	WELDED
FL	FLUSH OR FLOOR	PC	PIECE	WR	WATER RESISTANT
FLASH	FLASHING	PH	PENTHOUSE	W/O	WITHOUT
FLUOR	FLUORESCENT	PLT	PLATE	WP	WATERPROOF OR WORKING POINT
F/B	FACE OF BRICK	PL	PROPERTY LINE	WS	WEATHERSTRIPPING
				W (CONT.)	
				WSCT	WAINSCOT
				WT	WEIGHT
				WWF	WELDED WIRE FABRIC
				X	
				X'ER	TIMES OR BY (As in 2X4)
				Y	
				YD	YARD
				YR	YEAR

SYMBOLS LEGEND:

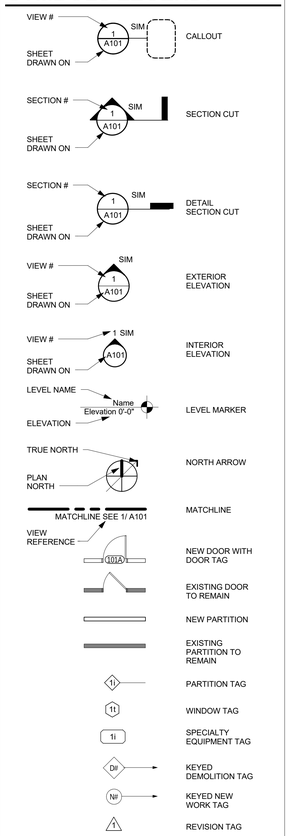

DRAWINGS INDEX:

O ISSUED
X DELETED
R ISSUED FOR REFERENCE ONLY

NO.	SHEET NAME	ISSUE DATES: PERMIT SET 12/22/2016	PERMIT REV 1 02/01/2017	BID SET 02/01/2017
COVER SHEET				
CS1.1	COVER SHEET	O	O	O
CIVIL				
C0.0	COVER	O	-	O
C1.0	NOTES AND DETAILS	O	-	O
C2.0	EXISTING CONDITIONS AND DEMOLITION PLAN	O	-	O
C3.0	LAYOUT PLAN	O	-	O
C4.0	GRADING AND DRAINAGE	O	-	O
ARCHITECTURAL				
AS1.1	ARCH SITE PLAN	O	-	O
AS1.2	ENLARGED SITE PLANS AND DETAILS	O	-	O
AS1.3	ENLARGED SITE PLANS AND DETAILS	O	O	O
AS1.4	ENLARGED SITE PLANS	O	-	O
LS1.1	LIFE SAFETY PLAN	O	O	O
LS1.2	CODE ANALYSIS	O	O	O
LS1.3	UL ASSEMBLIES AND ZONING	O	-	O
PH1.1	PHASING PLANS/ NOTES	O	-	O
A0.0	MASTER NOTES	O	-	O
A0.1	ACCESSIBILITY STANDARDS - 2009	O	-	O
D1.1	LEVEL 1 DEMOLITION PLAN AREA A	O	-	O
D1.2	LEVEL 1 DEMOLITION PLAN AREA B	O	-	O
D1.3	LEVEL 1 DEMOLITION PLAN AREA C1 AND C2	O	-	O
D1.4	ROOF DEMO PLAN	O	-	O
A1.0	LEVEL 1 - FLOOR PLAN - OVERALL	O	-	O
A1.1	LEVEL 1 - FLOOR PLAN AREA A	O	-	O
A1.2	LEVEL 1 - FLOOR PLAN AREA B	O	-	O
A1.3	LEVEL 1 - FLOOR PLAN AREA C1 AND C2	O	-	O
A1.4	ROOF PLAN	O	-	O
A1.5	ROOF PLAN - AREA A	O	O	O
A1.6	ROOF PLAN - AREA B	O	-	O
A1.7	ROOF PLAN - AREA C1 AND C2	O	-	O
A1.8	ROOF DETAILS	O	-	O
A2.1	DOOR SCHEDULES	O	-	O
A2.2	DOOR AND WINDOW DETAILS	O	-	O
A2.3	DOOR DETAILS	-	O	O
A3.1	EXTERIOR ELEVATIONS	O	-	O
A3.2	EXTERIOR ELEVATIONS	O	-	O
A3.3	BUILDING SECTIONS	O	-	O
A4.1	WALL SECTIONS	O	-	O
A5.1	EXTERIOR DETAILS	O	-	O
A6.1	ENLARGED PLANS - ADMINISTRATION	O	-	O
A6.2	ENLARGED PLAN - KITCHEN	O	O	O
A6.3	ENLARGED PLAN - MEDIA CENTER	O	-	O
A6.4	ENLARGED PLAN - GYM	O	-	O
A6.5	ENLARGED PLAN - MUSIC AND ART	O	-	O
A6.6	ENLARGED PLAN - MISC	O	-	O
A6.7	ENLARGED CLASSROOM PLANS - PK & KG	O	-	O
A6.8	ENLARGED CLASSROOM PLANS - 1ST GRADE & 2ND GRADE	O	-	O
A6.9	ENLARGED CLASSROOM PLANS - 3RD GRADE & 4TH GRADE	O	-	O
A6.10	ENLARGED CLASSROOM PLANS - 5TH GRADE & SPECIAL ED	O	-	O
A6.11	ENLARGED TOILET PLANS AND ELEVATIONS	O	-	O
A6.12	ENLARGED TOILET PLANS AND ELEVATIONS	O	-	O
A6.13	ENLARGED TOILET PLANS AND ELEVATIONS	O	-	O
A7.1	INTERIOR CORRIDOR ELEVATIONS - RESOURCE / MAIN	O	-	O
A7.2	INTERIOR CORRIDOR ELEVATIONS - SOUTH / S-EAST / S-WEST	O	-	O
A7.3	INTERIOR CORRIDOR ELEVATIONS - 3RD / 4TH / 5TH	O	-	O
A7.4	INTERIOR CORRIDOR ELEVATIONS - PRE-K / K / ENRICHMENT	O	-	O
A7.5	INTERIOR ELEVATIONS	O	-	O
A8.1	INTERIOR PARTITIONS	O	-	O
A8.2	INTERIOR DETAILS	O	-	O
A9.1	INTERIOR CASEWORK DETAILS	O	-	O
A9.2	INTERIOR CASEWORK DETAILS	O	-	O
A10.1	REFLECTED CEILING PLAN - AREA A	O	-	O
A10.2	REFLECTED CEILING PLAN - AREA B	O	-	O
A10.3	REFLECTED CEILING PLAN - AREA C1 AND C2	O	-	O
F0.1	FINISH SCHEDULE AND DETAILS	O	-	O
F1.1	FINISH PLANS - AREA A	O	-	O
F1.2	FINISH PLANS AND EQUIPMENT PLANS - AREA B	O	-	O
F1.3	FINISH PLANS AND EQUIPMENT PLANS - AREA C1 AND C2	O	-	O
F2.1	FINISH FLOOR PATTERNS	O	-	O
F2.2	FINISH WALL PATTERNS	O	-	O

DRAWINGS INDEX:

O ISSUED
X DELETED
R ISSUED FOR REFERENCE ONLY

NO.	SHEET NAME	ISSUE DATES: PERMIT SET 12/22/2016	PERMIT REV 1 02/01/2017	BID SET 02/01/2017
F3.1	FINISH DETAILS	O	-	O
STRUCTURAL				
S0.1	STRUCTURAL NOTES	O	-	O
S0.2	DESIGN TABLES	O	O	O
S1.1	LEVEL 1 - EXISTING FOUNDATION & FLOOR PLAN AREA A	O	-	O
S1.2	EXISTING FOUNDATION & FLOOR PLAN AREA B	O	-	O
S1.3	ROOF FRAMING PLAN AREA A	O	-	O
S1.4	ROOF FRAMING PLAN AREA B	O	-	O
S1.5	ROOF FRAMING PLAN AREA C1 & C2	O	-	O
S2.1	FOUNDATION SECTIONS AND TYPICAL DETAILS	O	-	O
S2.2	ROOF FRAMING TYPICAL DETAILS	O	-	O
S3.1	ROOF SECTIONS	O	-	O
S3.2	ROOF FRAMING TYPICAL DETAILS	O	-	O
MECHANICAL				
M0.1	MECHANICAL EQUIPMENT NOTES & LEGEND	O	O	O
M1.1	LEVEL 1 MECHANICAL DEMOLITION PLAN AREA A	O	-	O
M1.2	LEVEL 1 MECHANICAL DEMOLITION PLAN AREA B	O	-	O
M1.3	LEVEL 1 MECHANICAL DEMOLITION PLAN AREA C1 AND C2	O	-	O
M1.4	ROOF MECHANICAL DEMOLITION PLAN	O	-	O
M2.1	LEVEL 1 MECHANICAL DUCTWORK PLAN AREA A	O	O	O
M2.2	LEVEL 1 MECHANICAL DUCTWORK PLAN AREA B	O	-	O
M2.3	LEVEL 1 MECHANICAL DUCTWORK PLAN AREA C1 AND C2	O	-	O
M2.4	ROOF MECHANICAL PLAN	O	-	O
M3.1	LEVEL 1 MECHANICAL PIPING PLAN AREA A	O	-	O
M3.2	LEVEL 1 MECHANICAL PIPING PLAN AREA B	O	-	O
M3.3	LEVEL 1 MECHANICAL PIPING PLAN AREA C1 AND C2	O	-	O
M4.1	MECHANICAL ENLARGED PLANS	O	-	O
M5.1	MECHANICAL DETAILS	O	O	O
M5.2	MECHANICAL DETAILS	O	-	O
M6.1	MECHANICAL DDC CONTROLS	O	-	O
M6.2	MECHANICAL ELECTRIC SEQUENCE & DDC CONTROLS	O	-	O
PLUMBING				
P0.1	PLUMBING LEGEND, NOTES & SCHEDULES	O	O	O
P0.2	PLUMBING DETAILS	O	-	O
P1.1	LEVEL 1 PLUMBING DEMOLITION PLAN AREA A	O	-	O
P1.2	LEVEL 1 PLUMBING DEMOLITION PLAN AREA B	O	-	O
P1.3	LEVEL 1 PLUMBING DEMOLITION PLAN AREA C1 AND C2	O	-	O
P2.1	LEVEL 1 PLUMBING FOUNDATION PLAN AREA A	O	-	O
P2.2	LEVEL 1 PLUMBING FOUNDATION PLAN AREA B	O	-	O
P2.3	LEVEL 1 PLUMBING FOUNDATION PLAN AREA C1 AND C2	O	-	O
P3.1	LEVEL 1 PLUMBING SANITARY PLAN AREA A	O	-	O
P3.2	LEVEL 1 PLUMBING SANITARY PLAN AREA B	O	-	O
P3.3	LEVEL 1 PLUMBING SANITARY PLAN AREA C1 AND C2	O	-	O
P4.1	LEVEL 1 PLUMBING DOMESTIC PLAN AREA A	O	-	O
P4.2	LEVEL 1 PLUMBING DOMESTIC PLAN AREA B	O	-	O
P4.3	LEVEL 1 PLUMBING DOMESTIC PLAN AREA C1 ANC C2	O	-	O
P5.1	PLUMBING - ENLARGED TOILET PLANS	O	-	O
P5.2	PLUMBING - ENLARGED KITCHEN PLANS	O	-	O
ELECTRICAL				
E0.1	ELECTRICAL LEGEND, DETAILS AND LIGHTING SCHEDULE	O	-	O
E0.2	ELECTRICAL DETAILS	O	-	O
E0.3	ELECTRICAL DETAILS	O	-	O
E0.4	ELECTRICAL DETAILS	O	-	O
E1.1	LEVEL 1 ELECTRICAL DEMOLITION PLAN AREA A	O	-	O
E1.2	LEVEL 1 ELECTRICAL DEMOLITION PLAN AREA B	O	-	O
E1.3	LEVEL 1 ELECTRICAL DEMOLITION PLAN AREA C1 AND C2	O	-	O
E2.1	LEVEL 1 ELECTRICAL LIGHTING PLAN AREA A	O	O	O
E2.2	LEVEL 1 ELECTRICAL LIGHTING PLAN AREA B	O	O	O
E2.3	LEVEL 1 ELECTRICAL LIGHTING PLAN AREA C1 AND C2	O	O	O
E3.1	LEVEL 1 ELECTRICAL POWER PLAN AREA B	O	O	O
E3.2	LEVEL 1 ELECTRICAL POWER PLAN AREA A	O	O	O
E3.3	LEVEL 1 ELECTRICAL POWER PLAN AREA C1 AND C2	O	O	O
E4.1	LEVEL 1 ELECTRICAL LOW VOLTAGE PLAN AREA A	O	O	O
E4.2	LEVEL 1 ELECTRICAL LOW VOLTAGE PLAN AREA B	O	O	O
E4.3	LEVEL 1 ELECTRICAL LOW VOLTAGE PLAN AREA C1 AND C2	O	O	O
E5.1	ELECTRICAL ENLARGED KITCHEN PLAN	O	-	O
E6.1	ELECTRICAL POWER RISER DIAGRAM	O	-	O
E6.2	ELECTRICAL PANELBOARD SCHEDULES	O	-	O
E6.3	ELECTRICAL PANELBOARD SCHEDULES	O	-	O

BID ALTERNATES:

A. ALTERNATE NO. 1: DEDUCT – Control System Manufacturer.

1. Base bid component parts of the Division 23 Instrumentation and Control System shall be manufactured by Johnson Controls, no substitute. Deduct alternate pricing shall be provided for Alerton, Trane, Siemens, and Tridium.

B. ALTERNATE NO. 2: ADD – Gym Wood Floor Refinishing and Striping.

1. Add alternate for stripping, sanding, refinishing and striping of the existing gymnasium wood floor assembly as indicated on the construction documents.

C. ALTERNATE NO. 3: ADD – Locker Repainting.

1. Add alternate for electrostatic repainting of all existing metal lockers throughout the school as indicated on the construction documents.

VDOE S.D.E 082-97-00-101

architecture incorporated
1902 campus commons drive
suite 101
reston, virginia 20191
Tel: 703.476.3900
Fax: 703.264.0733
www.archinc.com

Construction Documents for:
ROCKINGHAM CO. PUBLIC SCHOOLS
JOHN WAYLAND ES
RENOVATION AND ADDITION
801 N. MAIN STREET,
BRIDGEWATER, VA 22812

Project: 16034-01

Issued 02-01-2017

BID SET

Revisions

1 PERMIT REV 1 02/01/17

COVER SHEET

Scale: **As indicated**
Drawn: KBEL4
Checked: CRS

CS1.1

BID SET

1/31/2017 2:47:18 PM
C:\Users\KimB\Documents\16034-01_Wayland ES_CENTRAL_2016_kimb.rvt